

Nmod Series Introduction

-Nm3/Nm4/Nm4D/Nm5

Ecran LED extra plat




Nm Series

Applications diverses

Plat Panel, Versatile

- Front and rear servicing and installation, no need catwalk
- Totally close mounted onto the wall, saving space
- Different panel size can be customized
- Vertical and horizontal installation available
- 4 in 1 Sub-frame for option, faster installation, saving your labor cost

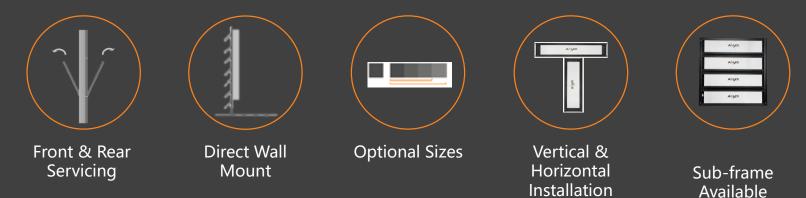

Innovation

Slim – Beyond Your Imagination



- Cabinet thickness is 54mm, direct wall mount thickness is 80mm, saving your space
- Cabinet weight is only 8.8kg, convenient delivery and installation



Refined Image Quality



160° Wide Angle

- High gray scale in low brightness, vivid details display
- Adopt A3C technology, clear display effect, high uniformity
- 160° view angle, wide view area, even in side still keep good display pictures
- Clothing, jewelry, beauty makeup... show your clients the best




Refined

Smart Monitoring, You See Everything


N3/N4/N4D/N5

No need monitoring card or cables, support PC, iPad, iPhone, Android smart phone, real-time monitoring working status, failure report will be sent into your mailbox immediately.

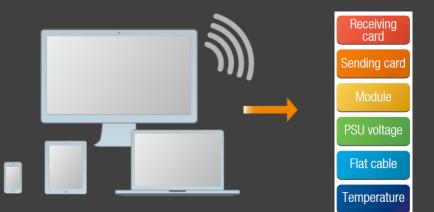



Smart Module, You Know Everything

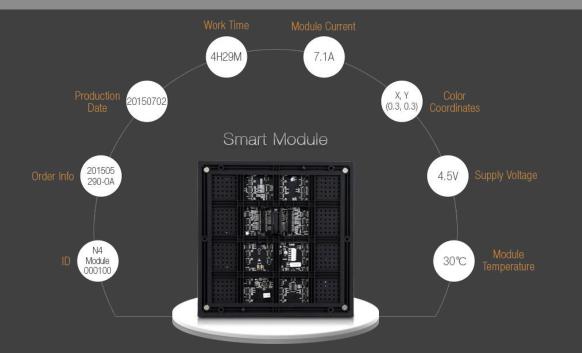

Nm series is a new revolution product, every module keeps record including ID number, order index number, production date, work time, module current, color coordinates, module voltage, module temperature & etc., easy to trace.

Smart Design, Go As You Like

- Exterior one button to test
- Exterior index lamp, clearly working status
- Modular magnet design, fast servicing
- Fan-less design, super silent
- Modular individual power supply and data design, non-interfering



Parameters

Item	Nm2+	Nm3+	Nm4+	Nm5+	Unit
Technical Parameter					
Pixel Pitch	2,4	3,2	4	5.14	mm
Brightness	800	800	800	800	nit
Refresh Rate	≥1920	≥1920	≥1920	≥1920	Hz
Color Gray Scale	65536	65536	65536	65536	level
Power Consumption (Max./Avg.)	480/160	480/160	480/160	480/160	W/sq.m
Viewing Angle (H/V)	160/140	160/140	160/140	160/140	deg.
Panel Parameter					
Panel Dimensions	1400x288x54				mm
Module Dimensions	288x288				pixels
Panel Weight	8.8	8.8	9.2	8.8	kg
Panel Material	Aluminum				
IP Rating	IP50/IP51	IP50/IP51	IP50/IP51	IP50/IP51	
Operating Temperature	- 10~+40				°C