

PUPITRE MICROPHONE B701-M



Microphones and Stands

B701-M

Non-Preamplified Stands

Description:


Single-call base with dynamic microphone

Table-top microphone base, not pre-amplified, with a dynamic microphone on a flexible stem. Two microphone inclusion keys (one hold-down button for short messages and one toggle button for long messages). The base has a tough ABS structure and non-slip rubber feet. The base comes complete with a 5-metre long shielded connecting cable with an XLR connector and terminals for activating microphone precedence.

Technical data:

Type of microphone	Dynamic
Sensitivity	1,8 mV/Pa
Frequency response	100 ÷ 12.000 Hz
Impedance	500 Ω
LED-Consumption	8 mA (12 V)
Power supply (Precedence)	12 Vcc 8 mA (max)
Cable length	5 m, XLR plug
Net weight	0.88 kg
Gross weight	1.35 kg

Connection

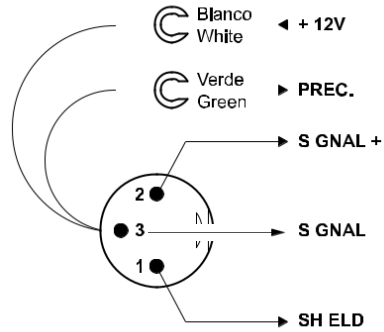

Dimensions

